

konische Lichtmaste

Mitglied der
MONTUM-Gruppe




nach DIN EN 40 aus Stahl feuerverzinkt gem. DIN EN ISO 1461
Tür DIN 49778 mit Dreikantschraube M10, Kabeleinführungsöffnung 50 x 150 mm
Gerätetesteg mit 2 Schiebemuttern M6

	Artikel-Nr.	LPH m	Erdstück m	WS mm	Zopf mm	Tür mm
Zopf 60	LM300603	3,0	0,7	3	60	400 x 85
	LM350603	3,5	0,7	3	60	400 x 85
	LM400603	4,0	0,8	3	60	400 x 85
	LM450603	4,5	0,8	3	60	400 x 85
	LM500603	5,0	0,8	3	60	400 x 85
	LM600603	6,0	1,0	3	60	400 x 85
	LM700603	7,0	1,0	3	60	400 x 85
	LM800603	8,0	1,2	3	60	400 x 85

Zopf 76	LM300763	3,0	0,7	3	76	400 x 85
	LM350763	3,5	0,7	3	76	400 x 85
	LM400763	4,0	0,8	3	76	400 x 85
	LM450763	4,5	0,8	3	76	400 x 85
	LM500763	5,0	0,8	3	76	400 x 85
	LM550763	5,5	0,9	3	76	400 x 85
	LM600763	6,0	1,0	3	76	400 x 85
	LM600764	6,0	1,0	4	76	400 x 85
	LM650763	6,5	1,0	3	76	400 x 85
	LM700763	7,0	1,0	3	76	400 x 85
	LM750763	7,5	1,0	3	76	400 x 100
	LM750764	7,5	1,0	4	76	400 x 100
	LM800763	8,0	1,2	3	76	400 x 100
	LM800764	8,0	1,2	4	76	400 x 100
	LM850763	8,5	1,2	3	76	400 x 100
	LM900763	9,0	1,5	3	76	400 x 100
	LM900764	9,0	1,5	4	76	400 x 100
	LM100763	10,0	1,5	3	76	400 x 100
LM100764	10,0	1,5	4	76	400 x 100	
LM120764	12,0	1,5	4	76	400 x 100	

Zopf 89	LM800904	8,0	1,2	4	89	400 x 100
	LM900894	9,0	1,5	4	89	400 x 100
	LM100894	10,0	1,5	4	89	400 x 100
	LM120894	12,0	1,5	4	89	400 x 100

Zopf 108	LM101084	10,0	1,5	4	108	400 x 100
	LM120108	12,0	1,5	4	108	400 x 100
	LM140108	14,0	1,5	4	108	400 x 100
	LM160108	16,0	1,5	4	108	400 x 100

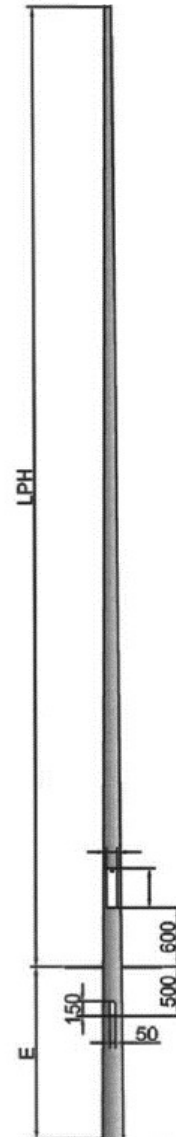

Zusatzoptionen:

- Pulverbeschichtung
- PE-Manschette
- Schutzanstrich Erdstück
- Stahlmanschette
- Kantenschutz
- Mastaufsätze
- Traversen
- Reduzierstücke
- Erweiterungsstück
- Flanschplatten
- usw.